


HOW TO REPLACE THE UV-C BULB

What you need:



- x1 Remington Airetrex 365 UV-C Bulb (REM-UVBULB-106A)
- x1 Remington Airetrex 365 Home Air Sanitizer (REM-7365UV-120)
- x1 Phillips Head Screwdriver

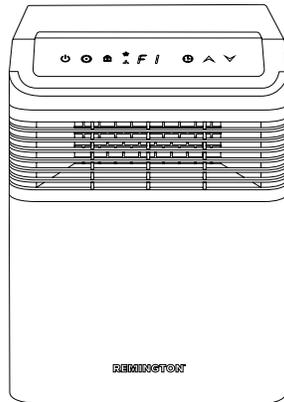

- ⚠ WARNING:** UV light is harmful to bare skin and eyes and can cause temporary or complete loss of vision. Never look directly at the UV bulb while illuminated.
- ⚠ CAUTION:** Breakable Glass Hazard. Can cause personal injury. Be careful when inserting bulb into base. Wear protective gloves when handling bulb.
- ⚠ CAUTION:** Personal Injury Hazard. Power supply can cause electrical shock. Disconnect power supply before cleaning or replacing ultraviolet bulb.
- ⚠ CAUTION:** UV Bulb Burn Hazard. Harmful to bare skin. Can cause severe burns. Disconnect power 15 minutes before removing ultraviolet bulb.
- ⚠ NOTICE:** Do not place your used bulb in the trash. Disposal of any item containing mercury must be in accordance with any hazardous waste disposal or recycling laws and regulations of your state.
- ⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects, and other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

1. Be sure the power has been disconnected for at least 15 minutes before replacing the UV-C bulb.
2. Rotate the unit so you are facing the backside of the unit. You should be seeing the filter, the cord wrap and the power on/off switch.
3. While facing the back side of the unit, remove the 5 screws on the left-hand side. (Figure A)
4. Slide the left side panel toward you to expose the bulb harness. (Figure B)
5. Remove the two screws securing the bulb (Figure C) and gently pull the bulb harness and base out of the unit.
6. Pull the bulb out of the holder (Figure D) and replace with the REM-UVBULB-106A replacement bulb. Be sure the four prongs align before pushing the bulb into the holder.
7. Making sure the bulb aligns with internal base holder, insert the bulb and base back into the unit and secure with the two screws.
8. Replace side panel and secure with the five screws.

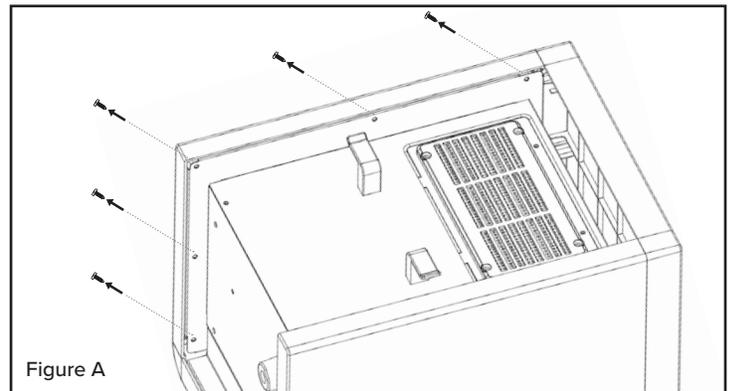


Figure A

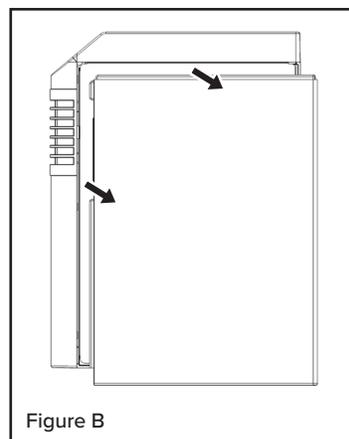


Figure B

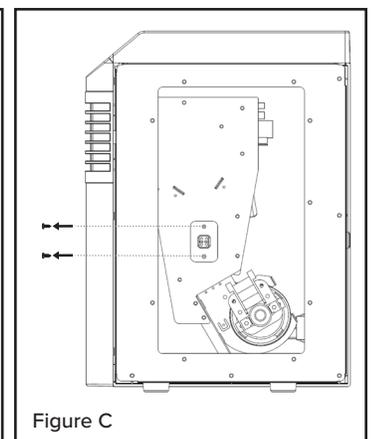


Figure C

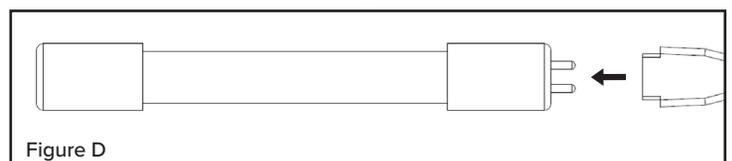


Figure D

NEED PARTS OR FURTHER ASSISTANCE?

PHONE

(800) 641-6996

WEB

remingtonfan.com